



ЗАВОД ЗА ПЛАСТМАСОВИ ТРЪБИ

PLASTIC PIPES FACTORY



“ПЛАСТЕК” ООД
4006 Пловдив, п.к. 66
ул. „Удроу Уилсън” 14
тел.: 032/ 681440; факс: 032/ 681965

PLASTEC Ltd.
14, Woodrow Wilson Str.
BG – 4006 Plovdiv, P.O.Box 66
phone: +359/ 32 681 440, fax: +359/ 681 965

www.plastec-bg.com, info@plastec-bg.com


CORRUGATED SEWAGE PIPE GOFRI KAN® PE

Material: PE (polyethylene)

Ring stiffness acc. EN 9969: SN 4, SN 8


Color: for DN/ID outside – black, inside – yellow
for DN/OD outside – black, inside - green

Delivery: pipe with in-line coupling and a gasket ring or
* pipe with coupling and 2 gasket rings

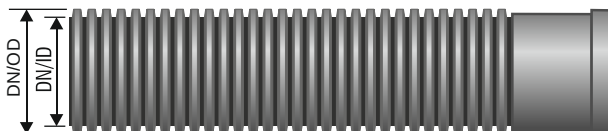

Inside Diameter DN/ ID [mm]	Ouside Diameter DN/OD [mm]	PIPE LENGTH WITHOUT COUPLING [M]
94.4	<u>DN 110*</u>	6.00
108.2	<u>DN 125*</u>	6.00
138	<u>DN 160*</u>	6.00
173	<u>DN 200*</u>	6.00
271	<u>DN 315</u>	6.00
<u>DN 150*</u>	174	6.00
<u>DN 200</u>	234	6.00
<u>DN 250</u>	291	6.00
<u>DN 300</u>	347	6.00
<u>DN 400</u>	461	6.00
<u>DN 500</u>	577	5.93
<u>DN 600</u>	698	5.91

COUPLING
with pipe stop



GASKET RING

made of EPDM for easy installation,
acc to EN 681-1

